

4


3

2

1



ISOMETRIC VIEW
FOR REF. ONLY
NTS

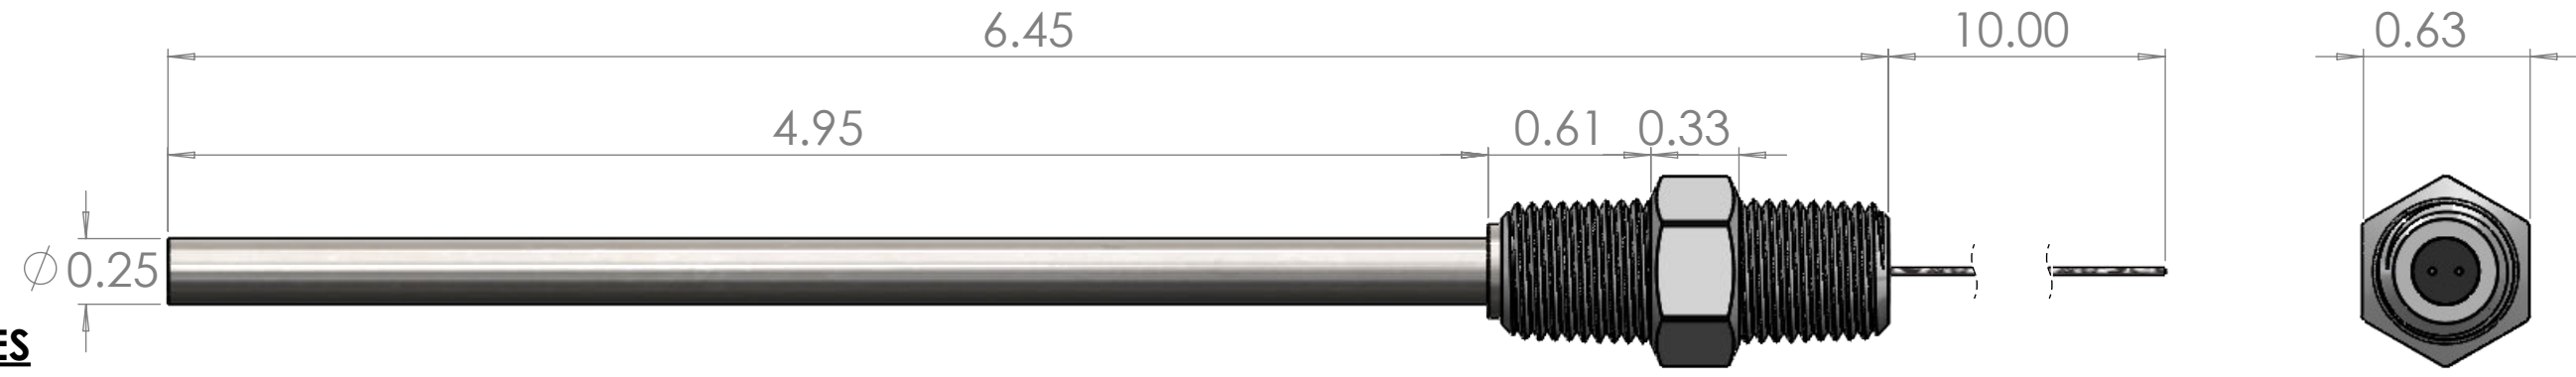

NOTES

1. DESIGNED FOR IMMERSION IN FLUIDS AND HIGH HUMIDITY ENVIRONMENTS. CAN BE USED FOR OTHER APPLICATIONS.
2. HELIUM LEAK RATE: 10⁻⁷ atm- cc/s OR LESS
3. MAX OPERATING TEMPERATURE: APPLICATION SPECIFIC
4. HEATER:
 - A. 10W, 240V
 - B. HERMETICALLY SEALED WITH BCE PROPRIETARY EPOXY SEAL (NASA LOW OUTGASSING SPEC, ASTM E595)
 - C. FIBERGLASS LEADS (OTHER MATERIALS AND LENGTHS AVAILABLE)
 - D. 300 SERIES STAINLESS STEEL SHEATH
 - E. OPTIONAL BUILT-IN THERMOCOUPLE AVAILABLE
5. 1/4" NPT FITTING ON TIP FOR EASY MOUNTING. OTHER OPTIONS AVAILABLE.
6. **ALL DIMENSIONS, MATERIALS, FEATURES CAN BE CUSTOMIZED.**

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN INCHES
 TOLERANCES:
 FRACTIONAL ±1/32
 ANGULAR: MACH ± 1.0 BEND ±2.0
 TWO PLACE DECIMAL ±0.01
 THREE PLACE DECIMAL ±0.005

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BELILOVE COMPANY ENGINEERS (BCE). ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BELILOVE COMPANY ENGINEERS (BCE) IS PROHIBITED.

INTERPRET GEOMETRIC TOLERANCING PER:
 MATERIAL SEE BOM
 FINISH N/A
 DO NOT SCALE DRAWING



TITLE:
SUBMERSIBLE HEATER

SIZE	DWG. NO.	REV
B	BCE10232	1
SCALE: NTS		SHEET 1 OF 1

4

3

2

1

B

B

A

A