
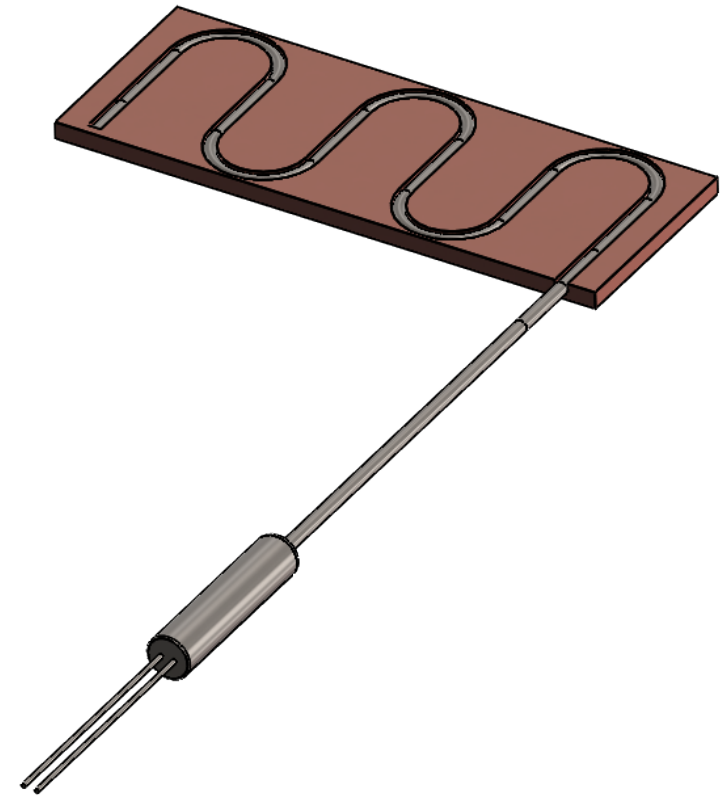
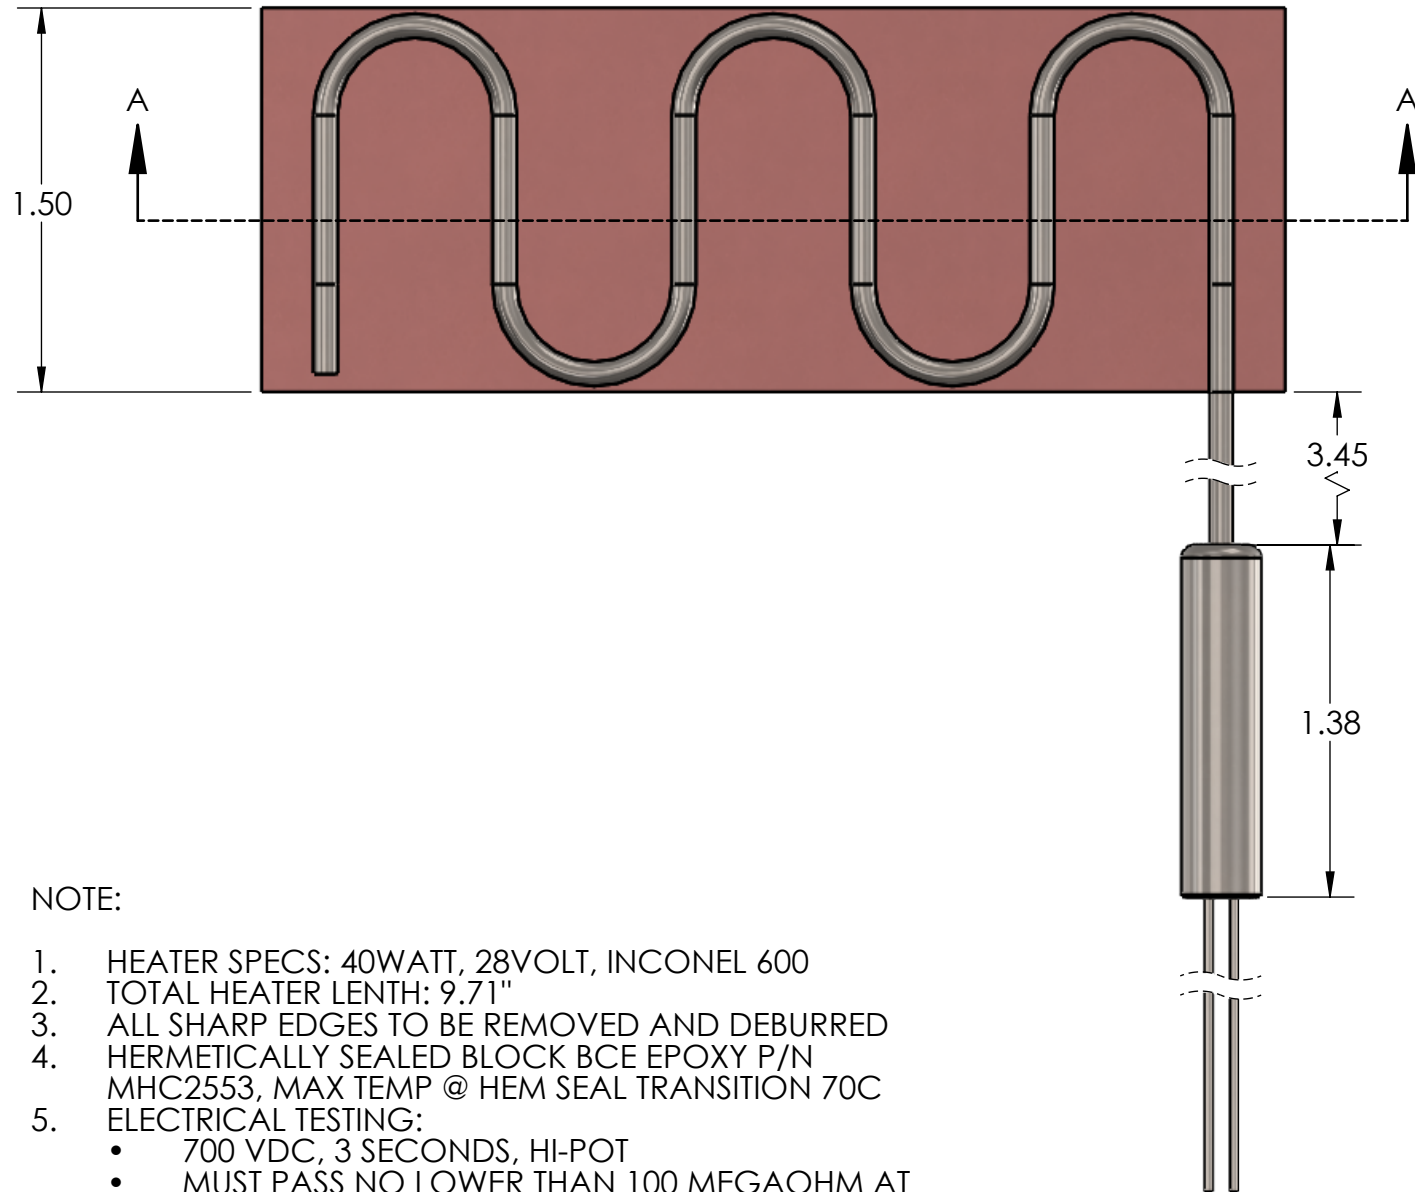


4

3

2

1

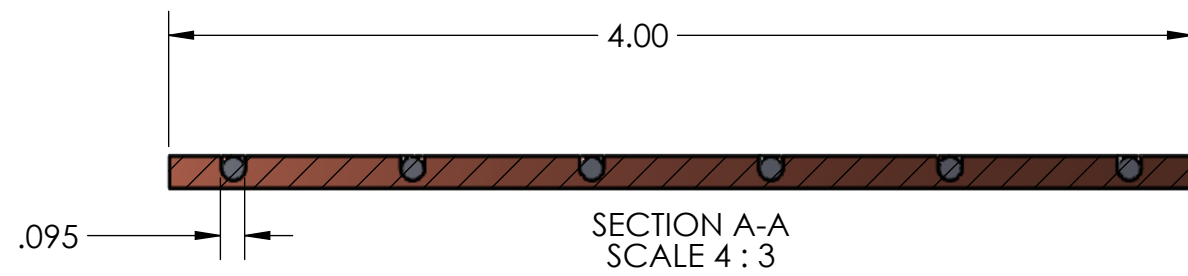

NOTE:

1. HEATER SPECS: 40WATT, 28VOLT, INCONEL 600
2. TOTAL HEATER LENTH: 9.71"
3. ALL SHARP EDGES TO BE REMOVED AND DEBURRED
4. HERMETICALLY SEALED BLOCK BCE EPOXY P/N MHC2553, MAX TEMP @ HEM SEAL TRANSITION 70C
5. ELECTRICAL TESTING:
 - 700 VDC, 3 SECONDS, HI-POT
 - MUST PASS NO LOWER THAN 100 MEGAOHM AT 500VDC, 5 SECONDS

	NAME	DATE	THE INFORMATION GIVEN HEREIN IS BASED ON DATA BELIEVED TO BE ACCURATE, BUT BCE MAKES NO EXPRESSED OR IMPLIED WARRANTIES AS TO ITS ACCURACY AND ASSUMES NO LIABILITY ARISING OUT OF ITS USE BY OTHERS. THIS INFORMATION DOES NOT CONSTITUTE A LICENSE TO USE OR INFRINGE ON ANY PATENTS PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BELILOVE CO ENGINEERS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BELILOVE CO. ENGINEERS IS PROHIBITED.	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ± .01 THREE PLACE DECIMAL ± .007 INTERPRET GEOMETRIC TOLERANCING PER:			
DRAWN	W.T.						
CHECKED							
ENG.APPR.							
MFG.APPR.							
Q.A.							
COMMENTS							
					TITLE: HEM SEALED HEATER COPPER & INCONEL		
					SIZE B	DWG. NO. BCE11260	REV 0
				DO NOT SCALE DRAWING	SCALE: 1:2	SHEET 1 OF 1	

4

3

2

1

B

B

A

A