


4

3





2

1

ISOMETRIC VIEW
SCALE: NTS
FOR REF. ONLY

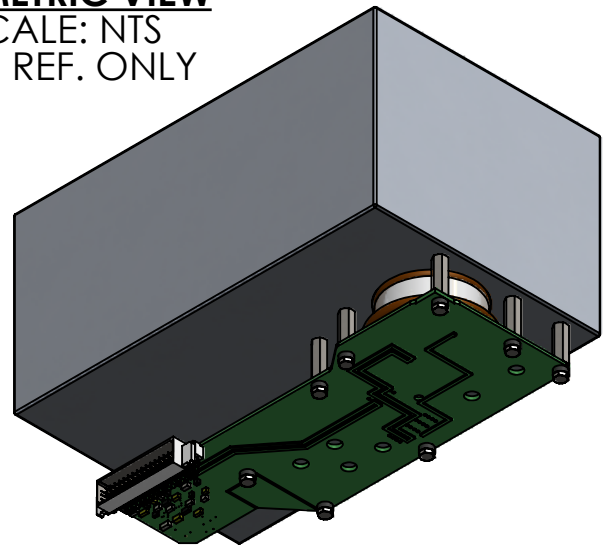

SECTION VIEW SHOWING INSTALLATION OF FEEDTHROUGH IN CHAMBER
FOR REF. ONLY
NTS

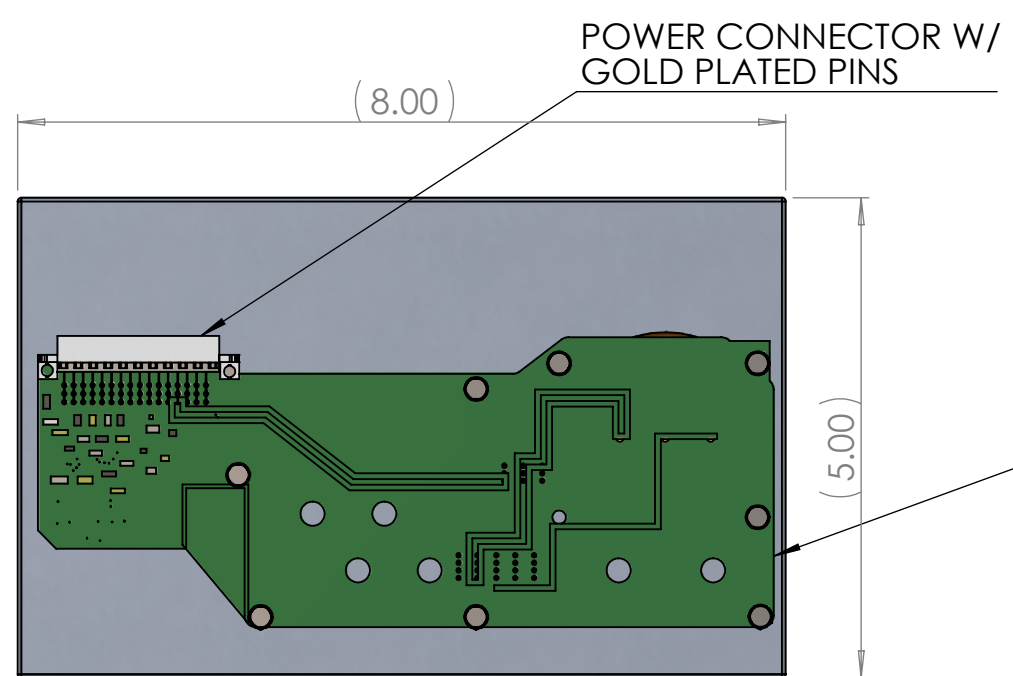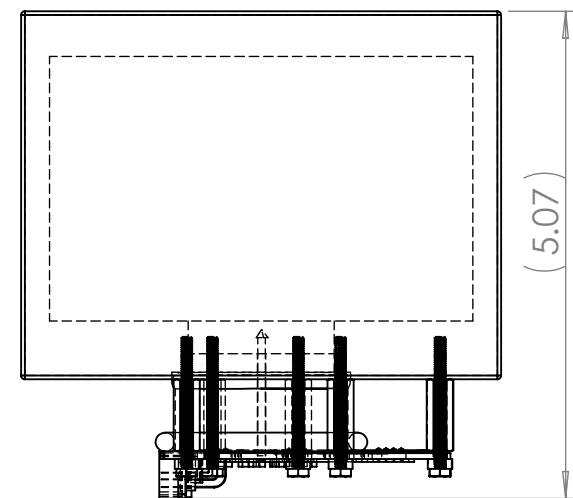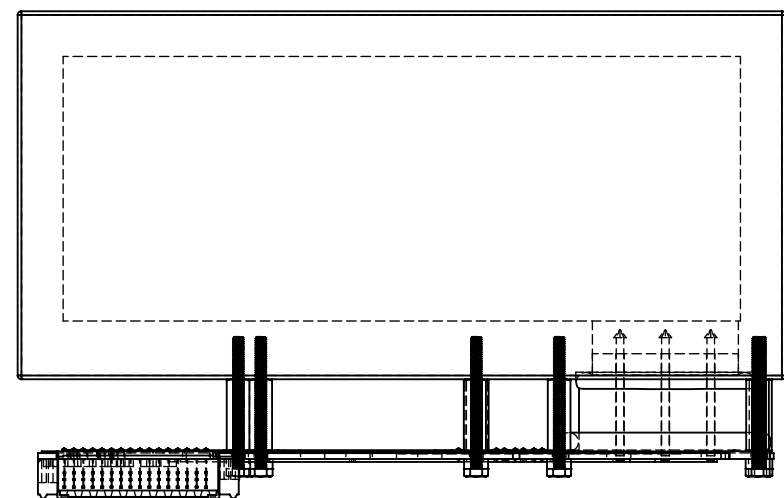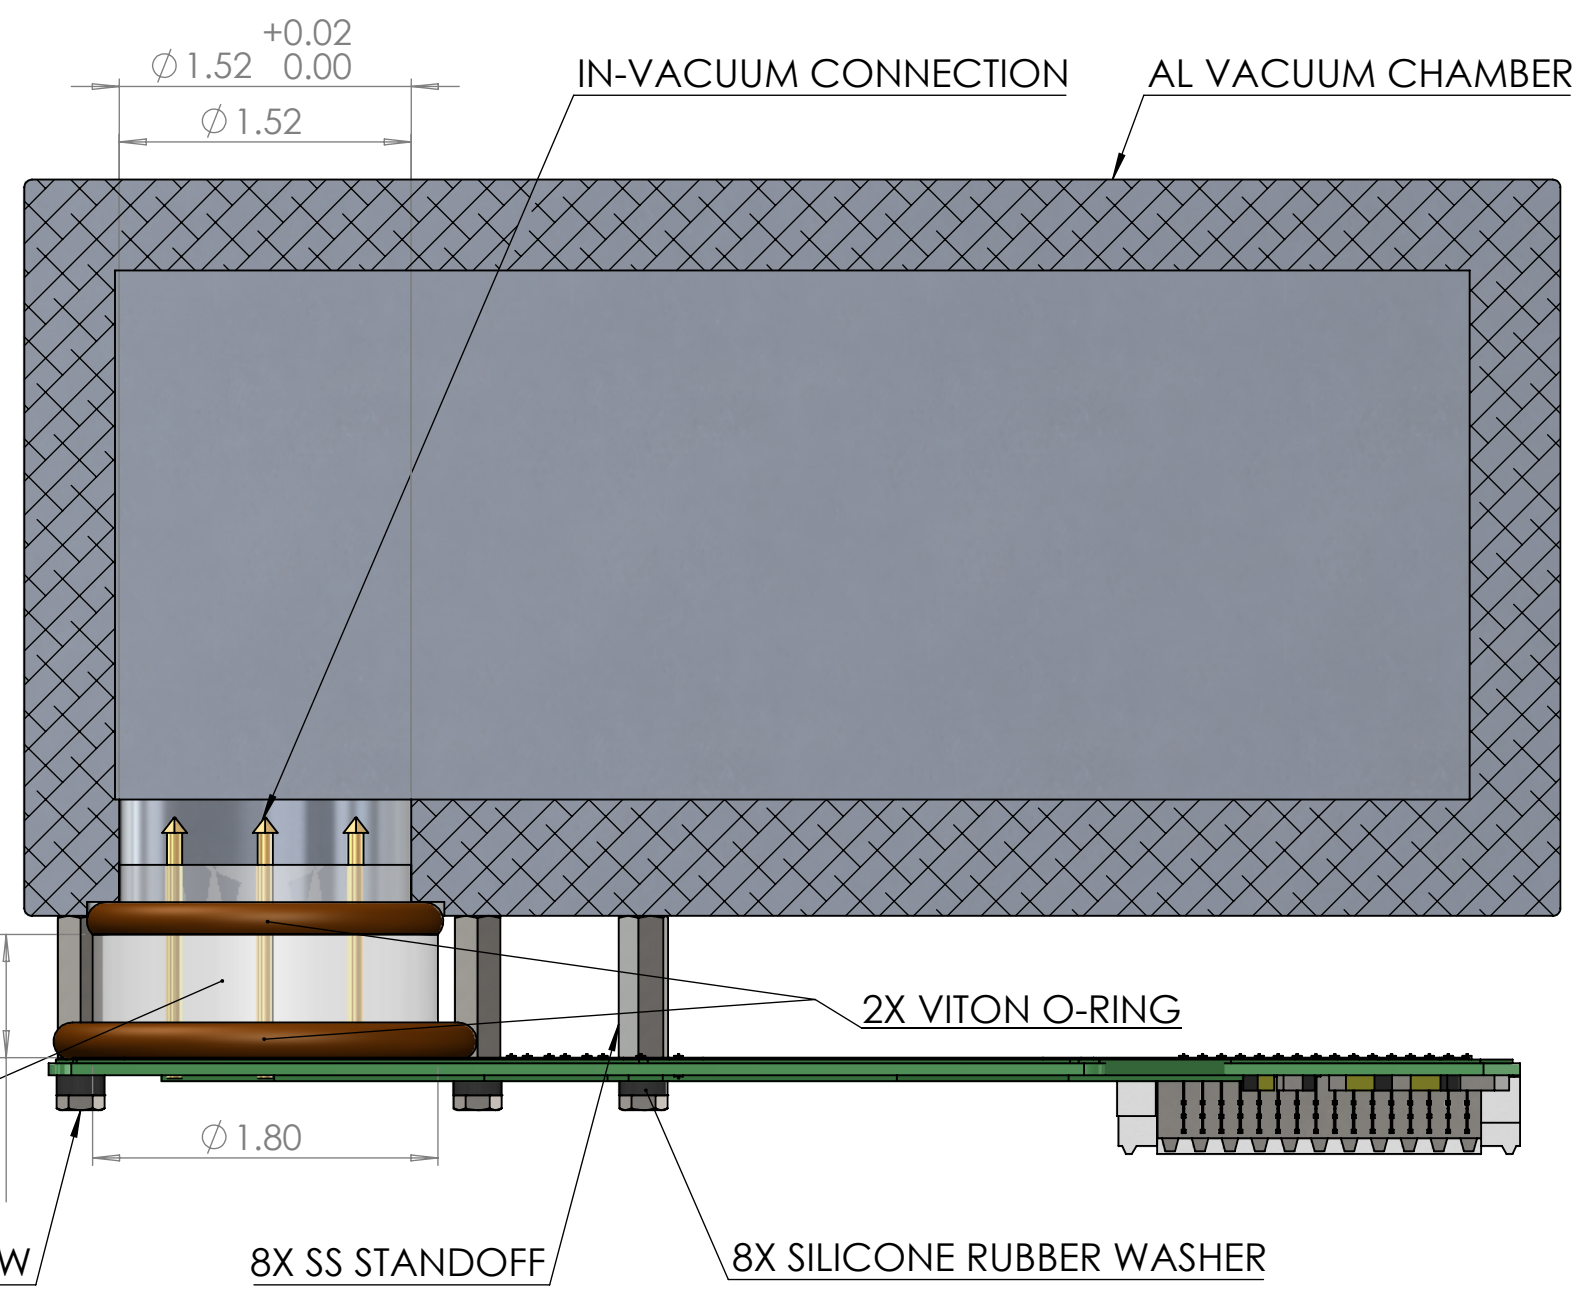

POWER CONNECTOR W/
GOLD PLATED PINS

BCE EPOXY SEAL

8X SS HEX HEAD SCREW

PCB BOARD

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL ±
ANGULAR: MACH ± BEND ±
TWO PLACE DECIMAL ± .010
THREE PLACE DECIMAL ± .005

INTERPRET GEOMETRIC
TOLERANCING PER:

MATERIAL SEE DWG

FINISH N/A

DO NOT SCALE DRAWING



TITLE:
**PCB MOUNTED VACUUM
FEEDTHROUGH
INSTALLATION**

SIZE DWG. NO. REV
B BCE10111 **A**

SCALE: NTS WEIGHT: N/A SHEET 1 OF 1

NOTES

1. TEMPERATURE: Application Specific
2. VACUUM LEAK RATING: Application Specific
3. CURRENT CAPACITY: UP TO 15A/PIN

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
BCE INC. ANY REPRODUCTION IN PART
OR AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF BCE INC. IS PROHIBITED.

4

3

2

1

B

B

A

A