



4

3

2

1


**ISOMETRIC VIEW**

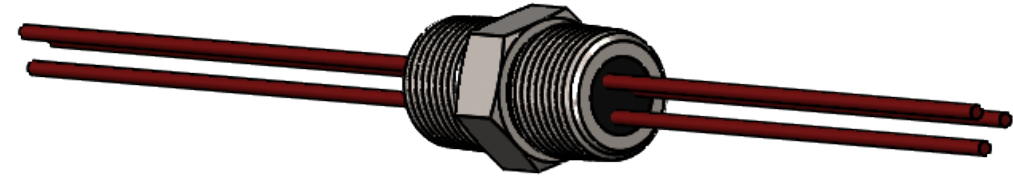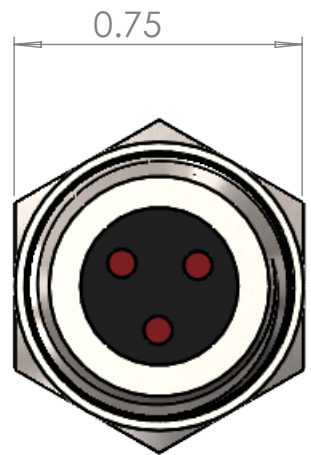

3X 22AWG Stranded Copper Leads

316SS 3/8" NPT 1-7/16"  
18 Threads Per Inch  
0.41" Thread Engagement

3X 22AWG Stranded Copper Leads

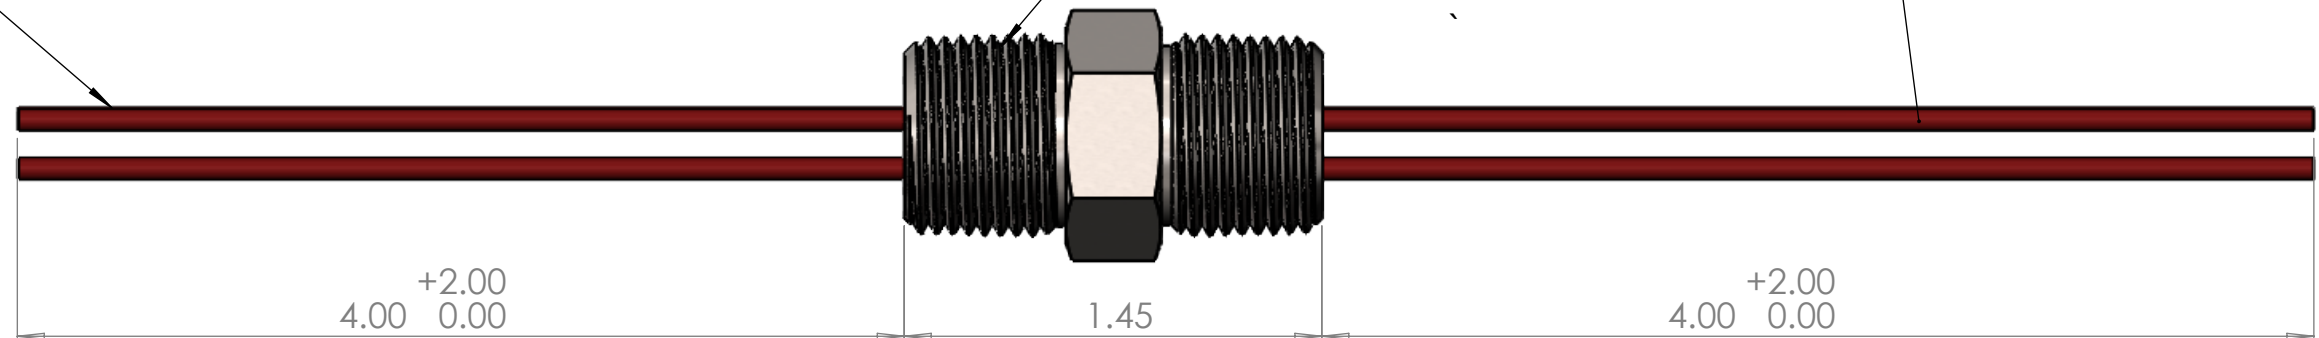

1. Operating Temperature: Room Temp  
2. Vacuum Rating: 0-2 torr

**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BELILOVE CO. ENGINEERS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BELILOVE CO. ENGINEERS IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:  
 DIMENSIONS ARE IN INCHES  
 TOLERANCES:  
 FRACTIONAL ±  
 ANGULAR: MACH ± BEND ±  
 TWO PLACE DECIMAL ±  
 THREE PLACE DECIMAL ±  
 INTERPRET GEOMETRIC TOLERANCING PER:  
 MATERIAL SEE DWG  
 FINISH SEE DWG  
 DO NOT SCALE DRAWING

	NAME	DATE
DRAWN	A.M	
CHECKED		
ENG APPR.		
MFG APPR.		
Q.A.		
COMMENTS:	THIS DRAWING IS FOR REFERENCE ONLY. FINAL PRODUCT MAY DIFFER.	

<b>BCE</b>		
TITLE: <b>M- Feedthrough</b>		
SIZE <b>B</b>	DWG. NO. <b>BCE10424</b>	REV <b>A</b>
SCALE: NTS	WEIGHT: N/A	SHEET 1 OF 1

4

3

2

1

B

B

A

A