
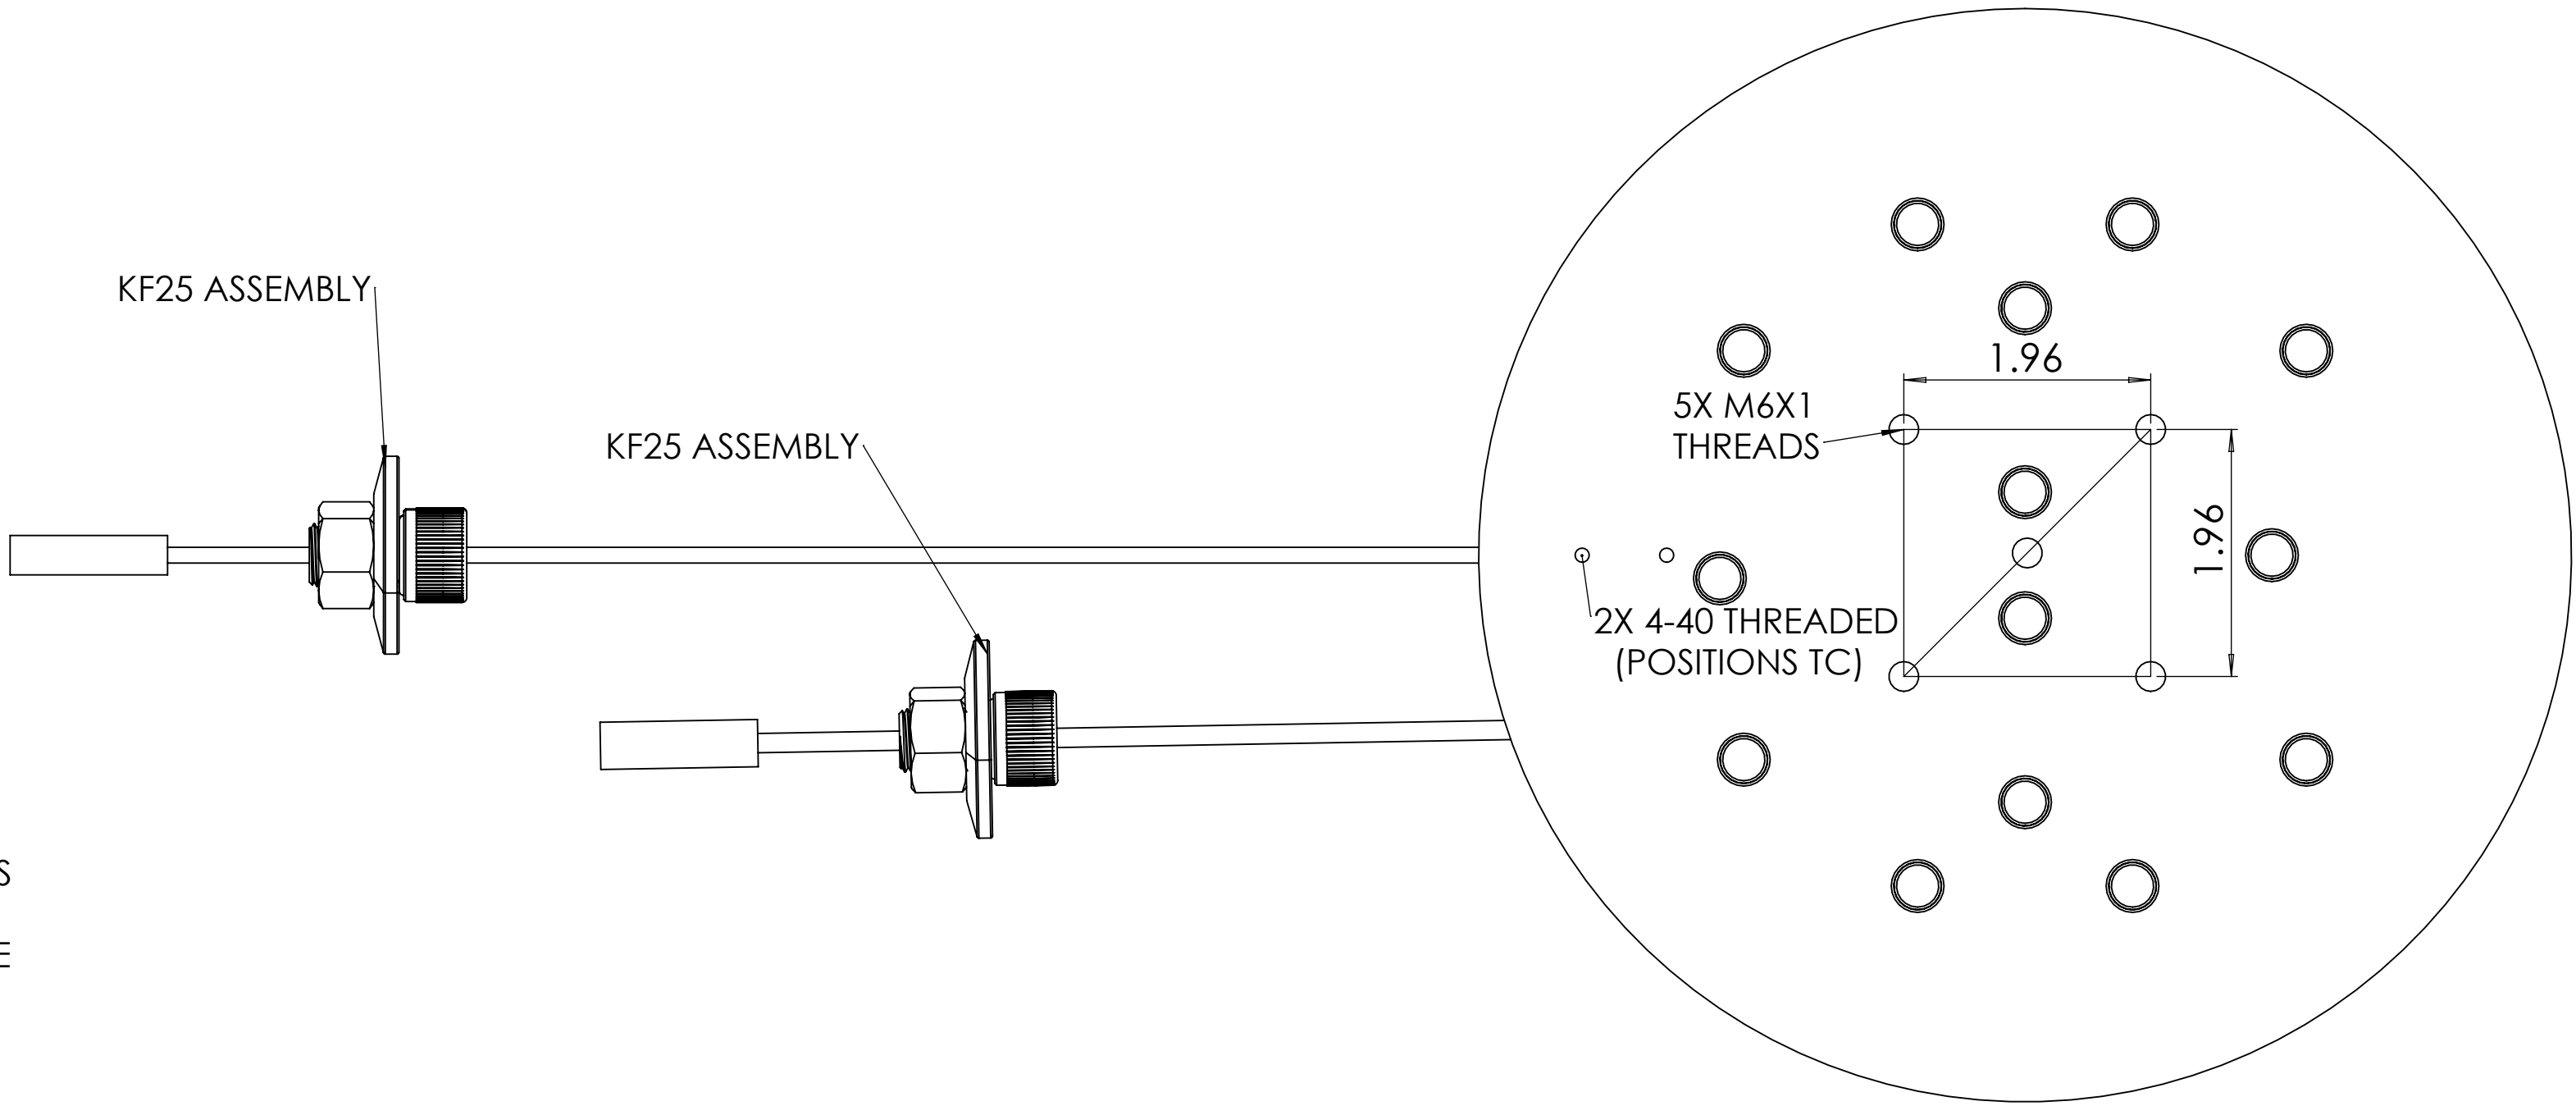
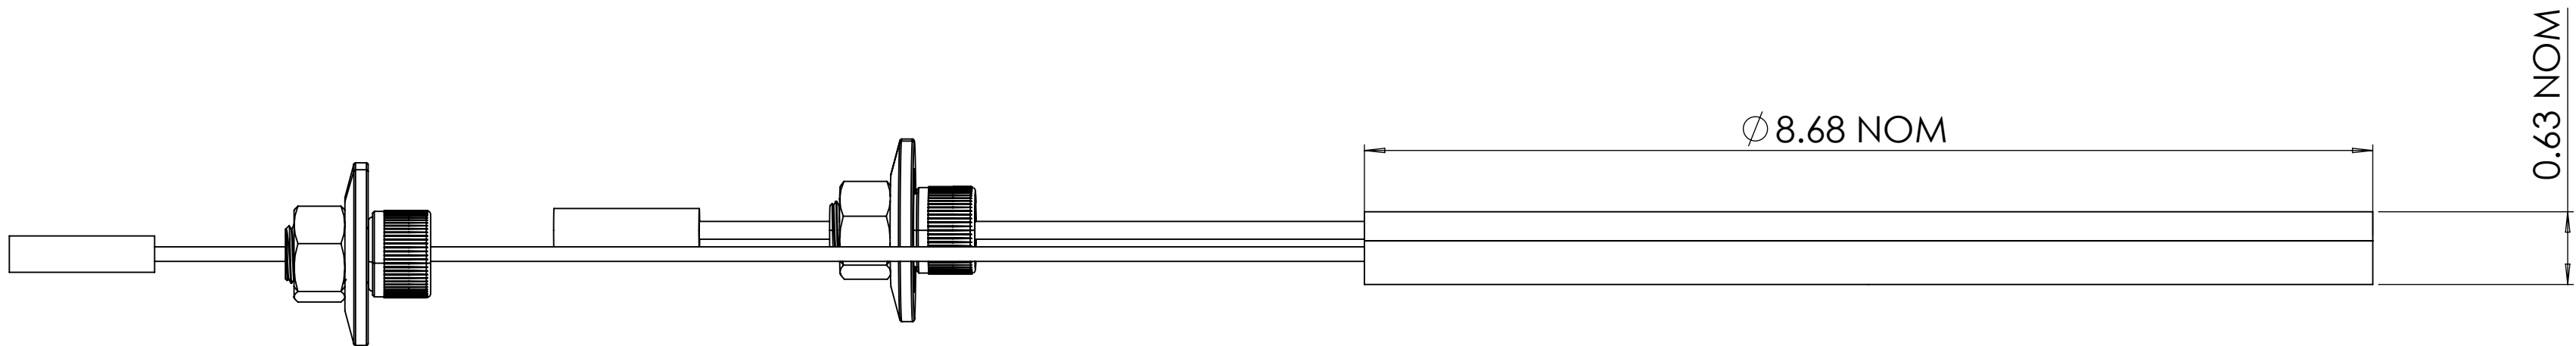


PLEASE SIGN TO APPROVE

SIGNATURE: _____/_____

The information given herein is based on data believed to be accurate, but BCE makes no expressed or implied warranties as to its accuracy, or performance, and assumes no liability arising out of its use by others. This information does not constitute a license to use or infringe on any patents.

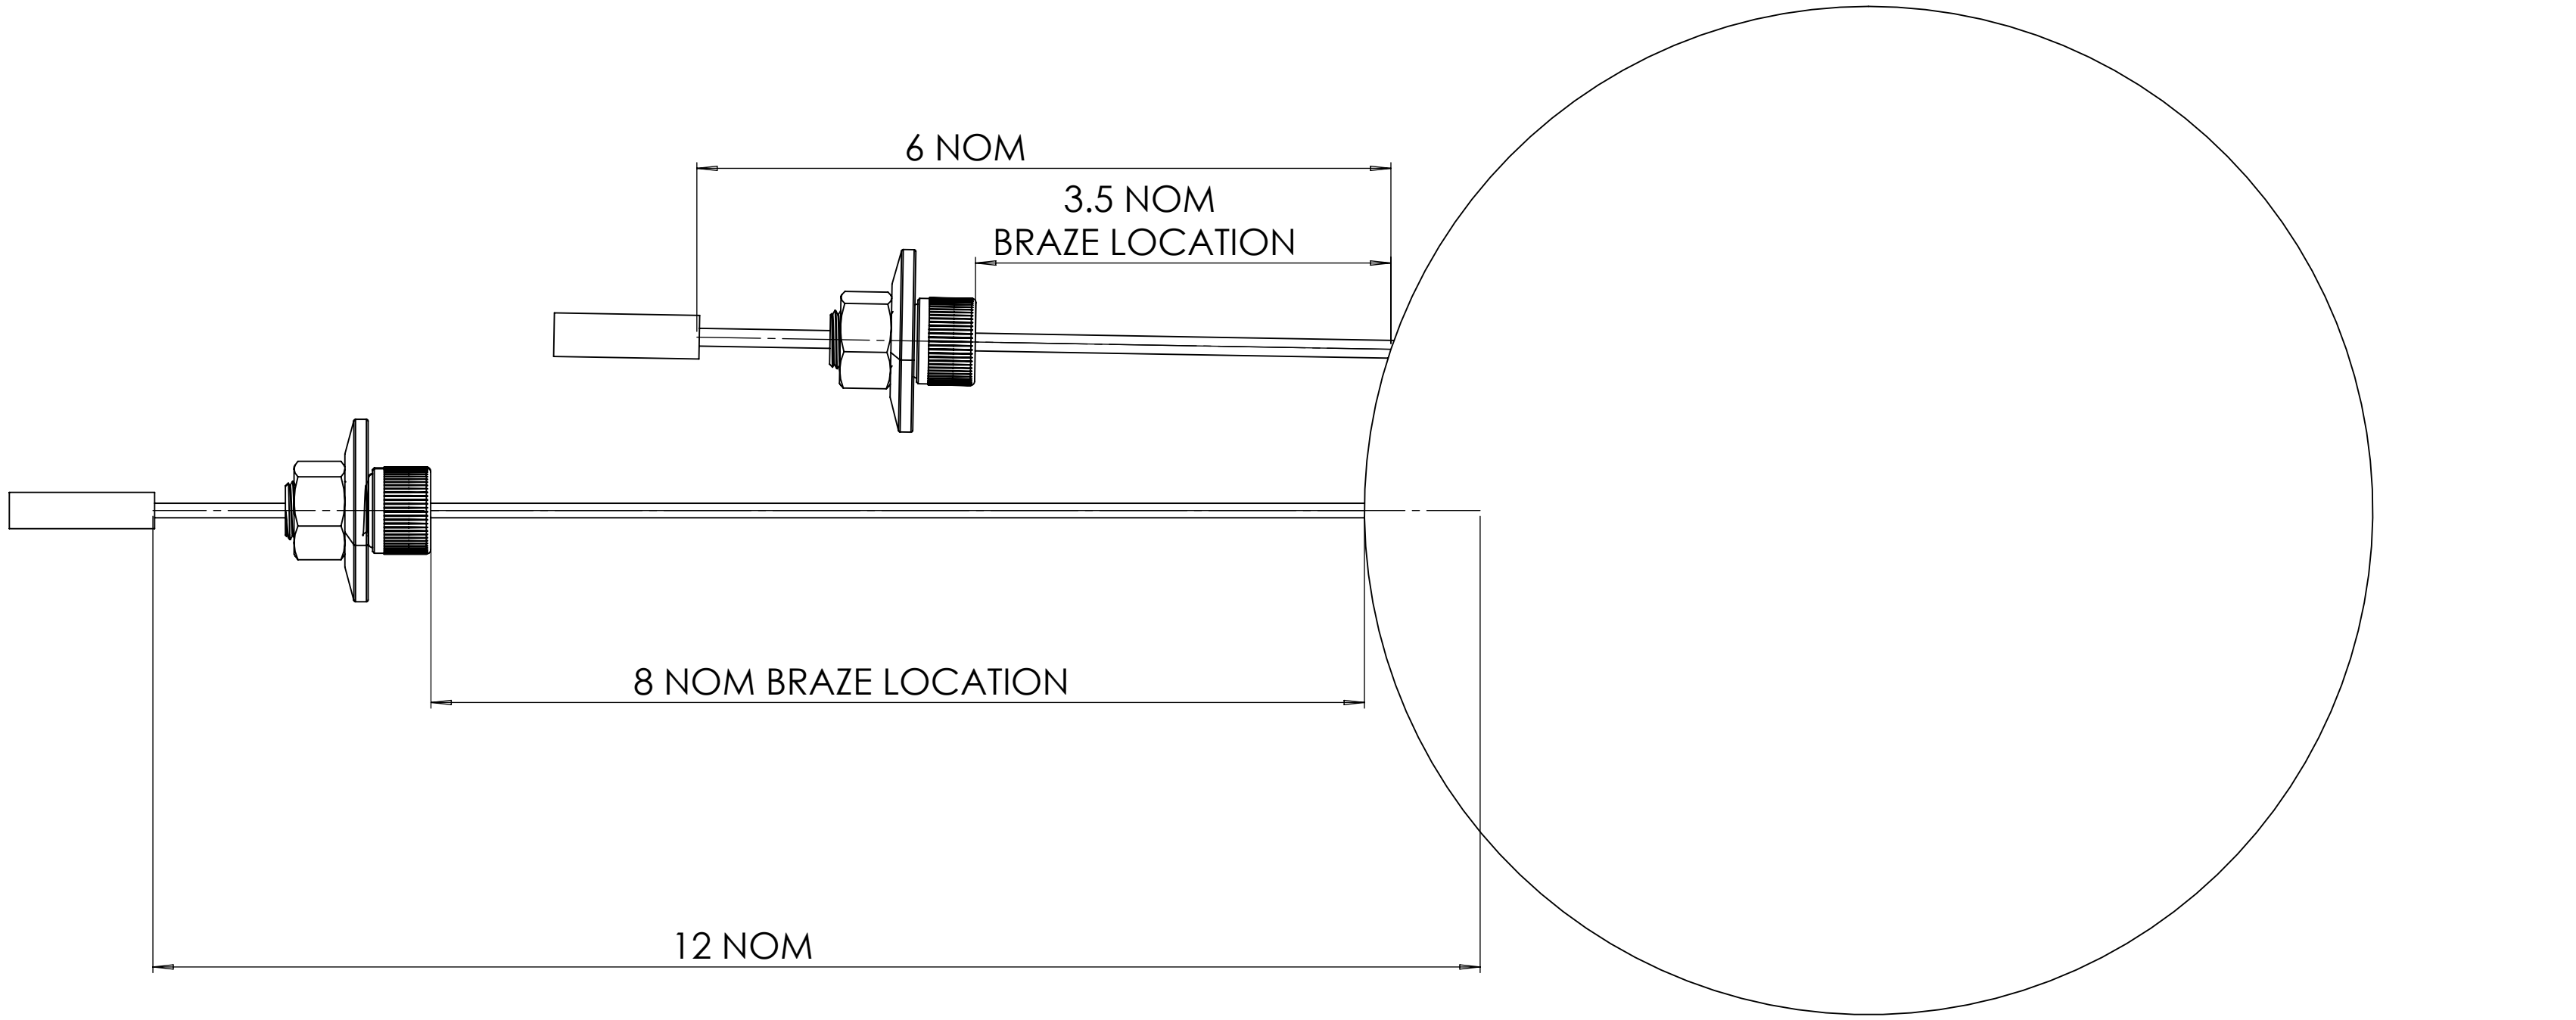

- ELECTRICAL: 1900 WATT(40WSI)(+/- 10%) 240 VOLTS -12" WIRE BRAID/36" FIBERGLASS LEADS
- STAINLESS STEEL 304 MAIN BODY CONSTRUCTION, INCONEL 600 HEATER, 56% SILVER BRAZE
- TYPE K VACUUM TC ASSEMBLY
- HE LEAK TESTED TO 1×10^{-7} ATM.CC/SEC
- TIG WELDED ASSEMBLY (SLIGHT BUILD UP AT SEAMS)
- BCE TO CHEMICALLY CLEAN WITH IPA, TAG WITH PN.
- ASSEMBLY TO BE POWERED UP & RAMPED IN ATMOSPHERE AT BCE PRIOR TO SHIPMENT. DISCOLORATION MAY BE PRESENT.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
BCEMFG.
ANY REPRODUCTION IN PART OR AS A
WHOLE WITHOUT THE WRITTEN
PERMISSION OF BCEMFG IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE	BCE 21060 Corsair Blvd Hayward, CA 94545 TITLE: 1900 WATT, 240 VOLT HOT CHUCK SIZE DWG. NO. REV D BCE11717 - SCALE: NTS WEIGHT: SHEET 1 OF 1
		DIMENSIONS ARE IN INCHES TOLERANCES:	DRAWN	A.M		
		FRACTIONAL: + ANGULAR: MAACH: + BEND: + TWO PLACE DECIMAL: ±0.015 THREE PLACE DECIMAL: ±0.007	CHECKED	D.S		
		INTERPRET GEOMETRIC TOLERANCING PER:	ENG APPR.	A.M		
		MATERIAL	MFG APPR.			
		FINISH	Q.A.	COMMENTS:		
NEXT ASSY	USED ON	SEE NOTES				
APPLICATION		DO NOT SCALE DRAWING				